




## ALLSTATE GASKET MATERIAL SPECIFICATIONS

### STYLE 1175 CLOTH-INSERTED RUBBER

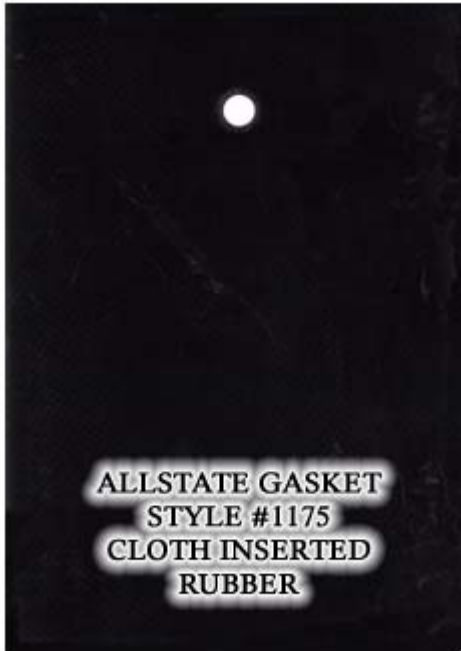

**Features:** Cloth inserted rubber

**Material:** SBR

**Color:** Black

**Recommended Uses:** When combination of rubber for sealing and cloth insertion for strength is required or when movement in service (bolt holes, clamps and pressure) requires a reinforced rubber gasket.

- Available in full rolls - see sizes below
- Available in sheets
- Can be supplied in cut-to-width strips
- Pressure sensitive adhesive backing is also available
- Sizes vulcanized to infinity

**Operating Temperature:** -20°F to +170°F

**Sizes:** 48" widths

**Thicknesses:** 1/16" thru 1/4"

SIZES						
Thicknesses			Widths		Full Roll Length	
Fractions	Decimal	mm	Inches	Meters	Feet	Meters
1/16"	.062"	1.588	36"* (Special Order)  48"	0.914 1.22		
3/32"	.093"	2.381				
1/8"	.125"	3.175				
3/16"	.187"	4.762				
1/4"	.250"	6.350				

SPECIFICATIONS						
Durometer Hardness Shore A ±5	Tensile	Elongation	Fabric Weight	Fabric Type	Oil Resistance	Finish
70	450	200	4.0 oz.	Polyester	None	Smooth