




## ALLSTATE GASKET MATERIAL SPECIFICATIONS

### **STYLE 1190 NITRILE - BUNA-N**

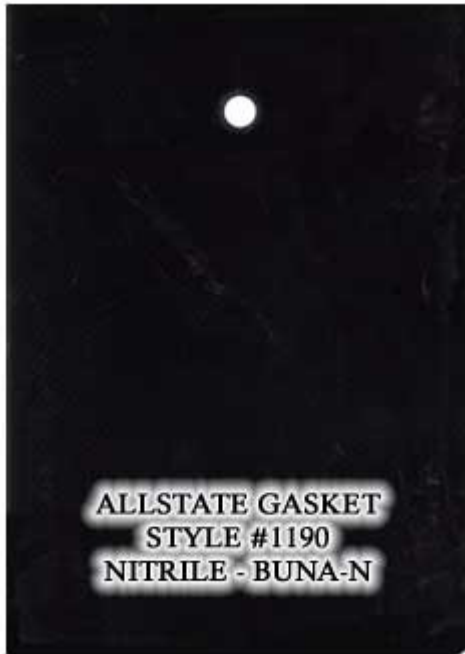

**Features:** Oil and gasoline resistance.

**Material:** Butadiene Acrylonitrile (NBR).

**Color:** Black

**Recommended Uses:** Gasoline and oil resistant; hydro-carbons; aliphatic; dynamic properties.

- Available in full rolls - see sizes below
- Available in sheets
- Can be supplied in cut-to-width strips
- Pressure sensitive adhesive backing is also available
- Sizes vulcanized to infinity

**Operating Temperature:** -20 °F to +180 °F

**Sizes:** See below.

**Thicknesses:** See below.

Durometer Hardness Shore A ±5	Tensile	Elongation	Wt. Per Lin. Foot 36"	Finish	Specifications
40	800	350	1/8-2.5	Smooth	ASTM D-2000   SAE J200   1BF 408Z1
50	800	300	1/8-2.6	Smooth	ASTM D-2000   SAE J200   1BF 508Z1
60	900	300	1/8-2.6	Smooth	ASTM D-2000   SAE J200   1BF 609
70	1000	200	1/8-2.7	Smooth	ASTM D-2000   SAE J200   1BF 710
80	1000	100	1/8-2.9	Smooth	ASTM D-2000   SAE J200   1BF 810

36" or 48" Width – (0.914 or 1.22 meters)					
Thicknesses			Thicknesses		
Fractions	Decimal	mm	Fractions	Decimal	mm
1/16"	.062"	1.588	7/16"	.438	11.11
3/32"	.093"	2.381	1/2"	.500	12.7
1/8"	.125"	3.175	9/16"	.563	14.23
3/16"	.187"	4.762	5/8"	.625	15.88
1/4"	.250"	6.350	3/4"	.75	19.05
5/16"	.313"	7.94	7/8"	.875	22.23
3/8"	.375"	9.53	1"	1	25.4