




ALLSTATE GASKET MATERIAL SPECIFICATIONS

STYLE 1155 **WIRE INSERTED RED RUBBER**

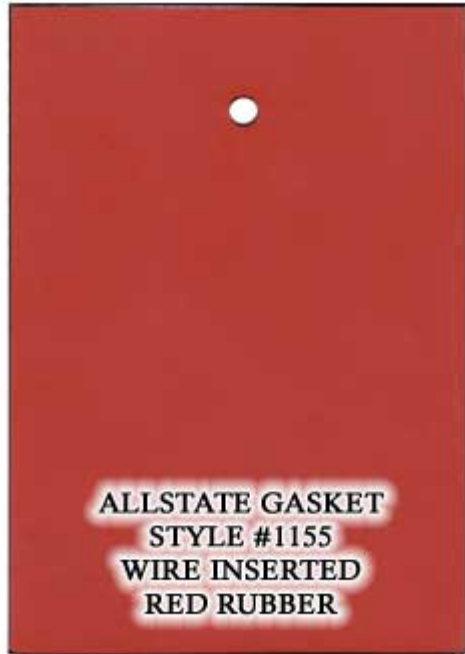

Features: Exceptional vibration resistance.

Material: Styrene Butadiene - Buna S - GRS reinforced with woven wire.

Color: Red

Recommended Uses: Service on hot or cold water or saturated steam lines up to 150 psi it is particularly useful where gaskets with narrow flanges are required or on pipe lines having considerable vibration.

- Available in full rolls - see sizes below
- Available in sheets

Operating Temperature:

Sizes: 48" widths.

Thicknesses: 1/16", 1/8"

Material	Manufactured from same high-grade red rubber compound used in style 1154, except reinforced with a woven wire.
----------	--