




Allstate Gasket & Packing, Inc • 31 Prospect Place • Deer Park, New York 11729-3713 USA
 Email: sales@allstategasket.com • Tel: (631) 254-4050 • Fax: (631) 254-4330

Visit our www.AllstateGasket.com for more information. Prices and availability may vary. All information is provided as reference, be sure to do your own testing for product suitability. No warranties or guarantees are expressed or implied.

STYLE 1208 EPDM - NYLON INSERTED DIAPHRAGM

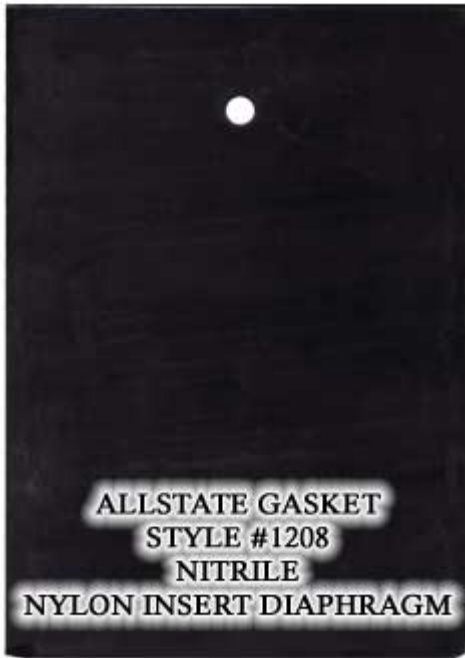

Features:

Material: Nitrile (Buna N) with Polymer Nylon Fabric Insertion (4oz.).

Color: Black

Recommended Uses: For applications requiring a high degree of resistance to oils, fuels and solvents at a reasonable cost.

- Available in full rolls - see sizes below
- Available in trimmed sheets
- Can be supplied in cut-to-width strips
- Pressure sensitive adhesive backing is also available
- Sizes vulcanized to infinity

Operating Temperature: 20°F To +200°F

Sizes:

Thicknesses:

See gasket material shelf life info on www.AllstateGasket.com

Hardness	60 ±5 DURO Shore A
Tensile	1000 PSI
Elongation	500%
Finish	Smooth
Test Method	Burst Test Across 2" Opening 7.0 Mpa (1015 PSI) 1/8" - 2 Ply