




ALLSTATE GASKET MATERIAL SPECIFICATIONS

STYLE 1115 SOLID SILICONE RUBBER

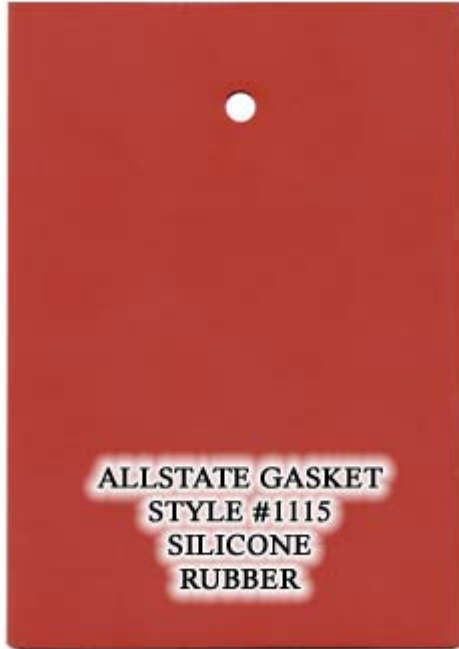

Features: Shelf life is greater than natural or synthetic rubbers - stays soft and flexible when stressed or exposed to weathering for long periods of time.

Material: Polysiloxane - TA

Color: Red-Orange

Recommended Uses: Used in applications calling for dielectric properties, weather resistance, oxidation, certain oils and chemicals.

- Available in full rolls and sheets
- Can be supplied in cut-to-width strips
- Pressure sensitive adhesive backing is also available
- Sizes vulcanized to infinity

Operating Temperature: -65°F to +450°F

Thickness	Widths	Full Roll Length
1/32"	36" & 48"	150 ft.
1/16"	36", 48" & 72"	100 ft.
3/32"	36" & 48"	75 ft.
1/8"	36", 48" & 72"	50 ft.
3/16"	36" & 48"	40 ft.
1/4"	36", 48" & 72"	40 ft.

Durometer Hardness Shore A ± 5	Tensile	Elongation	Specifications
40	725	300	ASTM D-2000 MIGE 405 / AMS 3301 ZZ-R-765 Class 2A & 2B
50	725	250	ASTM D-2000 MIGE 505 / AMS 3302 ZZ-R-765 Class 2A & 2B
60	725	200	ASTM D-2000 MIGE 605 / AMS 3303 ZZ-R-765 Class 2A & 2B
70	725	150	ASTM D-2000 MIGE 705 / AMS 3304 ZZ-R-765 Class 2A & 2B

Other, special thicknesses available, contact Allstate.