




## ALLSTATE GASKET MATERIAL SPECIFICATIONS

### STYLE 1119 NEOPRENE – BLACK

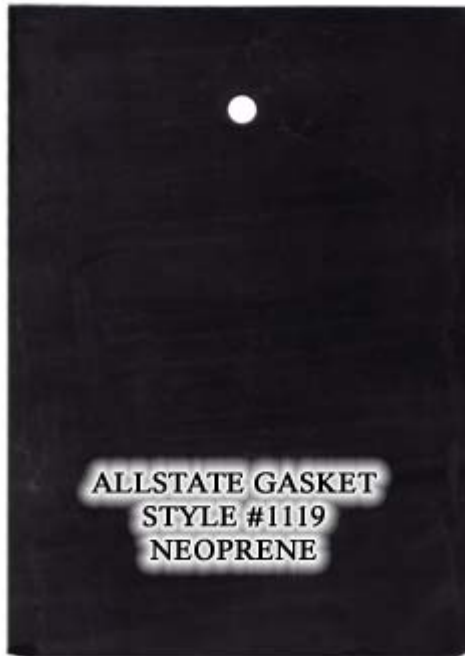

**Features:** Neoprene is a polymer that provides oil, weather, oxidation and sunlight resistance.

**Material:** Chloroprene

**Color:** Black

**Recommended Uses:** Neoprene is distinguished by the ASTM specifications, the effect of which is reflected in the physical properties.

- Available in full rolls - see sizes below
- Available in sheets
- Can be supplied in cut-to-width strips
- Pressure sensitive adhesive backing is also available
- Sizes vulcanized to infinity

**Operating Temperature:** -20°F to +170°F

**Finish:** Smooth

#### Specifications:

Durometer Hardness Shore A ±5	Tensile	Elongation	Wt. Per Lin. Foot 36"	Specifications
40	800	350%	1/8" - 2.5	ASTM D-2000   SAE J200 1BC 408Z1*   MIL R-3065   SC 408Z1*
50	800	300%	1/8" - 2.6	ASTM D-2000   SAE J200 1BC 508   MIL R-3065   SC 508
60	900	300%	1/8" - 2.7	ASTM D-2000   SAE J200 1BC 609   MIL R-3065   SC 609
70	1000	200%	1/8" - 2.7	ASTM D-2000   SAE J200 1BC 710   MIL R-3065   SC 710
80	1000	100%	1/8" - 2.9	ASTM D-2000   SAE J-200 1BC 810   MIL R-3065   SC 810

\* Z1 Elongation 350%

SIZES		
Thickness	Widths	Full Roll Length
1/32"	36" & 48"	150 ft.
1/16"	36", 48" & 72"	100 ft.
3/32"	36" & 48"	75 ft.
1/8"	36", 48" & 72"	50 ft.
3/16"	36" & 48"	40 ft.
1/4"	36", 48" & 72"	40 ft.
3/8"	36" & 48"	30 ft.
1/2"	36" & 48"	30 ft.
3/4"	36" & 48"	30 ft.
1"	36" & 48"	30 ft.

Other, special thicknesses available, contact Allstate.